

MULTIFUNCTION TIME RELAY IN CAGE-CLAMP TECH. 1
 NO CONTACT DELAYED,
 1 NO CONTACT NON-DELAYED, 1S...20S,
 AC/DC 24V, AC 200...240V

General technical details:		
product brand name		SIRIUS
product designation		timing relay
Protection class IP / on the front		IP40
Protection class IP / of the terminal		IP20
mounting position		any
Supply voltage frequency		
<ul style="list-style-type: none"> • 1 / for auxiliary and control current circuit 		
<ul style="list-style-type: none"> • initial rated value 	Hz	50
<ul style="list-style-type: none"> • final rated value 	Hz	60
Product function		
<ul style="list-style-type: none"> • star-delta circuit 		Yes
<ul style="list-style-type: none"> • with auxiliary voltage / pulse-shaping 		No
<ul style="list-style-type: none"> • at the relay outputs / changeover delayed/without delay 		No
Product component / semi-conductor output		No
Product extension / optional / remote control		No
Product extension / strictly required / remote control		No
Installation altitude / at a height over sea level / maximum	m	2,000
Ambient temperature		
<ul style="list-style-type: none"> • during storage 	°C	-40 ... +85
<ul style="list-style-type: none"> • during operating 	°C	-25 ... +60
<ul style="list-style-type: none"> • during transport 	°C	-40 ... +85
Relative humidity		
<ul style="list-style-type: none"> • during operating phase 	%	15 ... 70
Conductor-bound parasitic coupling BURST / according to IEC 61000-4-4		2 kV network connection / 1 kV control connection
Conductor-bound parasitic coupling conductor-earth SURGE / according to IEC 61000-4-5		2 kV
Conductor-bound parasitic coupling conductor-conductor SURGE / according to IEC 61000-4-5		1 kV
Electrostatic discharge / according to IEC 61000-4-2		4 kV contact discharge / 8 kV air discharge
Field-bound parasitic coupling / according to IEC 61000-4-3		10 V/m

Resistance against vibration		10 ... 55 Hz / 0.35 mm
Impulse voltage resistance / rated value	V	4,000
Insulation voltage / rated value	V	300
Active power loss / total / typical	W	2
Item designation / according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		K
Item designation / according to DIN EN 61346-2		K
Category / according to EN 954-1		none
Protection against electrical shock		finger-safe

Switching Function:

Switching function

• slow-operating	No
• making pulse contact	No
• firmly clocked beginning with pulse	No
• firmly clocked beginning with pause	No
• relapse delayed	No
• variably clocked start with impulse	No
• impuls variably clocked start with pause	No
• with auxiliary voltage	
• in an additive way slow-operating	No
• temporary line fault	No
• relapse delayed	No
• without auxiliary voltage / relapse delayed	No
• slow-operating/instantaneous contact	No
• with auxiliary voltage	
• relapse delayed/instantaneous contact	No
• slow-operating/relapse delayed/instantaneous contact	No
• firmly clocked beginning with pause/instantaneous contact	No
• making pulse contact/instantaneous contact	No
• with auxiliary voltage	
• temporary line fault/instantaneous contact	No
• pulse modelling/instantaneous contact	No
• slow-operating/instantaneous contact	No

General details:

Type of voltage / of the controlled supply voltage		AC/DC
Control supply voltage frequency		
• 1	Hz	50 ... 60
Control supply voltage		
• 1		

<ul style="list-style-type: none"> • at 50 Hz / for AC / rated value 	V	24
<ul style="list-style-type: none"> • at 60 Hz / for AC / rated value 	V	24
<ul style="list-style-type: none"> • for DC / rated value 	V	24
<ul style="list-style-type: none"> • 2 <ul style="list-style-type: none"> • at 50 Hz <ul style="list-style-type: none"> • for AC • at 60 Hz <ul style="list-style-type: none"> • for AC 	V	200 ... 240
<ul style="list-style-type: none"> • at 60 Hz <ul style="list-style-type: none"> • for AC 	V	200 ... 240
Operating range factor control supply voltage rated value		
<ul style="list-style-type: none"> • at 50 Hz <ul style="list-style-type: none"> • for AC 		0.85 ... 1.1
<ul style="list-style-type: none"> • at 60 Hz <ul style="list-style-type: none"> • for AC 		0.85 ... 1.1
<ul style="list-style-type: none"> • for DC 		0.85 ... 1.1

Auxiliary circuit:

Operating current / of auxiliary contacts		
<ul style="list-style-type: none"> • as normally closed contact / for AC-15 <ul style="list-style-type: none"> • at 24 V • at 250 V • as normally open contact / for AC-15 <ul style="list-style-type: none"> • at 24 V • at 250 V • at AC-15 <ul style="list-style-type: none"> • maximum • at DC-13 <ul style="list-style-type: none"> • at 24 V • at 125 V • at 250 V 	A	3
	A	3
	A	3
	A	3
	A	3
	A	1
	A	0.2
	A	0.1
Number of NC contacts / delayed switching		0
Number of NC contacts / non-delayed		0
Number of NO contacts / delayed switching		1
Number of NO contacts / non-delayed		1
Number of change-over switches / delayed switching		0
Number of change-over switches / non-delayed		0

Short-circuit:

Design of the fuse link / for short-circuit protection of the auxiliary switch / required		fuse gL/gG: 4 A
Type of mounting		screw and snap-on mounting onto 35 mm standard mounting rail

Installation/mounting/dimensions:		
Width	mm	22.5
Height	mm	84
Depth	mm	91
Distance, to be maintained, to the ranks assembly		
• upwards	mm	0
• forwards	mm	0
• sideways	mm	0
• backwards	mm	0
• downwards	mm	0
Distance, to be maintained, to earthed part		
• backwards	mm	0
• sideways	mm	0
• upwards	mm	0
• forwards	mm	0
• downwards	mm	0
Distance, to be maintained, conductive elements		
• downwards	mm	0
• backwards	mm	0
• sideways	mm	0
• forwards	mm	0
• upwards	mm	0

Connections:		
Design of the snap-on socket base		none
Design of the electrical connection		No spring-loaded terminals
• jumper socket		
• for auxiliary and control current circuit		
Type of the connectable conductor cross-section / for auxiliary contacts / solid		2x (0.25 ... 1.5 mm ²)
Conductor cross-section that can be connected / for auxiliary contact / solid		
• minimum	mm ²	0.25
• maximum	mm ²	1.5
Type of the connectable conductor cross-section / for auxiliary contacts / finely stranded / with conductor end processing		2x (0.25 ... 1.5 mm ²)
Conductor cross-section that can be connected / for auxiliary contact / finely stranded / with conductor end processing		
• minimum	mm ²	0.25
• maximum	mm ²	1.5
Type of the connectable conductor cross-section / for auxiliary contacts / finely stranded / without conductor final cutting		2x (0.25 ... 1.5 mm ²)

Conductor cross-section that can be connected / for auxiliary contact / finely stranded / without conductor final cutting <ul style="list-style-type: none"> • minimum • maximum 	mm ² mm ²	0.25 1.5
Type of the connectable conductor cross-section / for AWG conductors / for auxiliary contacts		2x (24 ... 16)
AWG number / as coded connectable conductor cross-section / for auxiliary contact <ul style="list-style-type: none"> • minimum • maximum 		24 16

Certificates/approvals:

Verification of suitability

CE / UL / CSA

General Product Approval

Declaration of Conformity

Test Certificates



CCC



CSA



GOST



UL



EG-Konf.

[Special Test Certificate](#)

Shipping Approval



BUREAU
VERITAS



DNV



GL



LRS



PRS



RINA

Shipping Approval

other



RMRS

[Confirmation](#)

[other](#)

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RP1574-2NP30/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RP1574-2NP30

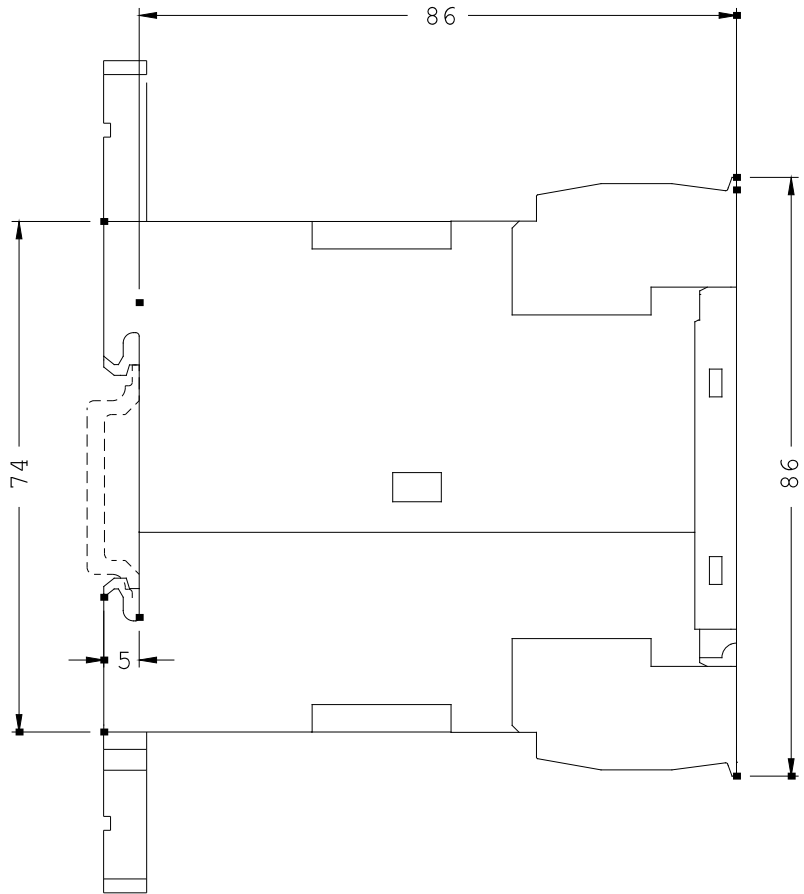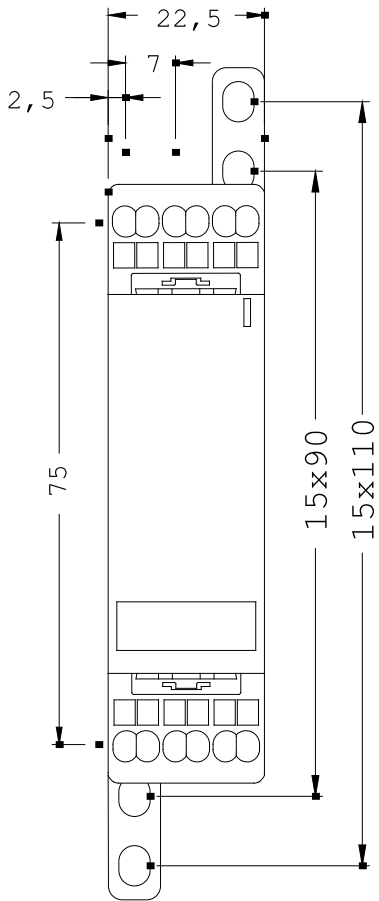

last change:

Feb 4, 2013