# SIEMENS

# **Product data sheet**

#### 3RS1010-1CK20



TEMPERATURE MONITORING RELAY FOR PT100, UNDERSHOOTING OF 1 THRESH. VAL., WIDTH 22ND5 MM 0 C-200 C, 110-120/220-240V AC 1 NO + 1 NC, CLOSED-CIRC.PRINC. SCREW CONNECTION

# General technical details:

| type of voltage                                 |    | AC  |
|-------------------------------------------------|----|-----|
| Supply voltage frequency                        |    |     |
| • 1 / for auxiliary and control current circuit |    |     |
| initial rated value                             | Hz | 50  |
| final rated value                               | Hz | 60  |
| • 1 / at 50 Hz / for AC / rated value           | V  | 110 |
| • 1 / at 60 Hz / for AC / rated value           | V  | 110 |
| • 2                                             |    |     |
| • at 60 Hz / for AC                             |    |     |
| rated value                                     | V  | 230 |
| • at 50 Hz / for AC                             |    |     |
| rated value                                     | V  | 230 |
| Number of measuring circuits                    |    | 1   |
| Product function                                |    |     |
| defect storage                                  |    | No  |
| reset external                                  |    | No  |
| Measurable temperature                          |    |     |
| initial value                                   | °C | 0   |
| • final value                                   | °C | 200 |
|                                                 |    |     |

| Item designation / according to DIN EN 61346-2                                              |    | К       |
|---------------------------------------------------------------------------------------------|----|---------|
| Item designation / according to DIN 40719 extendable after IEC 204-2 / according to IEC 750 |    | К       |
| Ambient temperature                                                                         |    |         |
| during operating                                                                            | °C | -25 +60 |

### Mechanical design:

| Design of the electrical connection                           |    |                           |
|---------------------------------------------------------------|----|---------------------------|
| <ul> <li>for auxiliary and control current circuit</li> </ul> |    | screw-type terminals      |
| • jumper socket                                               |    | Yes                       |
| Design of the sensor / connectable                            |    | PT100 (resistance sensor) |
| Number of NC contacts / for auxiliary contacts                |    | 1                         |
| Number of NO contacts / for auxiliary contacts                |    | 1                         |
| Number of change-over switches / for auxiliary contacts       |    | 0                         |
| Width                                                         | mm | 22.5                      |
| Height                                                        | mm | 92                        |
| Depth                                                         | mm | 91                        |

Certificates/approvals:

| General Produc | t Approval | Test Certificates           | other                        |                                |
|----------------|------------|-----------------------------|------------------------------|--------------------------------|
|                | GOST       | Special Test<br>Certificate | Declaration of<br>Conformity | Environmental<br>Confirmations |

#### Further information:

Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/industrial-controls/catalogs

#### Industry Mall (Online ordering system)


http://www.siemens.com/industrial-controls/mall


#### Cax online generator:

http://www.siemens.com/cax

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) http://support.automation.siemens.com/WW/view/en/3RS1010-1CK20/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3RS1010-1CK20

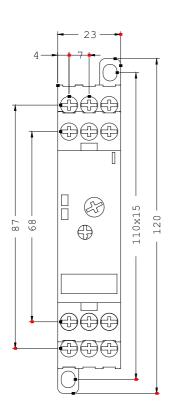

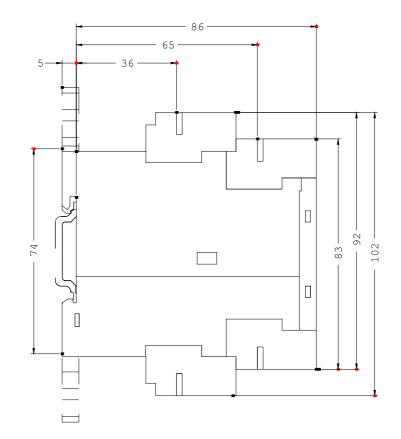

last change:

Jan 25, 2013