SIEMENS

Product data sheet

3RS1101-1CD20



TEMPERATURE MONITORING RELAY THERMOCOUPLE TYP K, EXCEEDING 1 THRESH. VAL., WIDTH 22ND5 MM 0 C - 200 C, 24V AC/DC 1 NO + 1 NC, CLOSED-CIRC.PRINC. SCREW CONNECTION

General technical details:

Hz	AC/DC
Hz	
Hz	
Hz	
	50
Hz	60
V	24
V	24
V	24
	No
	No
	1
	1
	1
	0
°C	0
°C	200
	К
	Hz V V

Item designation / according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		К
Ambient temperature		
during operating	°C	-25 +60

Mechanical design:	
--------------------	--

Design of the electrical connection		
 for auxiliary and control current circuit 		screw-type terminals
• jumper socket		Yes
Design of the sensor / connectable		type K (thermocouple)
Width	mm	22.5
Height	mm	102
Depth	mm	91

 Certificates/approvals:

 General Product Approval
 Test Certificates
 other

 Image: Colspan="5">Operation of Conformity
 Environmental Confirmations

 Image: Colspan="5">UP
 Image: Colspan="5">Operation of Conformity
 Environmental Confirmations

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/industrial-controls/mall


Cax online generator:


http://www.siemens.com/cax

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) http://support.automation.siemens.com/WW/view/en/3RS1101-1CD20/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RS1101-1CD20

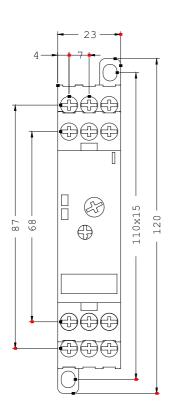

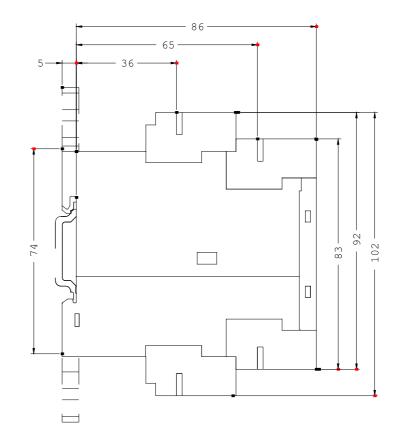

last change:

Jan 25, 2013