## SIEMENS

## **Product data sheet**

## 3RT2926-1BD00-ZX90



SURGE SUPPRESSOR, VARISTOR, AC 127...240V, DC 150...250V, FOR MOTOR CONTACTORS SZ S0, MULTI-UNIT PACKAGING

General technical data:				
product brand name		SIRIUS		
product designation		surge suppressor		
Size of the contactor		S0		
Design of the surge suppressor		with varistor		
Ambient temperature				
during storage	°C	-40 +80		
during operating	°C	-25 +60		


Control	
GOTTO	CILCUIL.

Type of voltage / of the controlled supply voltage		AC/DC
Control supply voltage frequency		
• 1 / rated value	Hz	50
• 2 / rated value	Hz	60
Control supply voltage / 1		
• for DC		
initial rated value	V	150
• final rated value	V	250
• at 50 Hz / for AC		
initial rated value	V	127
• final rated value	V	240

• at 60 Hz / for AC			
final rated value	V	240	
initial rated value	V	127	
Installation/mounting/dimensions:			
mounting position		any	
Type of mounting		clip-on	
Width	mm	30	
Height	mm	19	
Depth	mm	12	

Verification of suitability		CE /	CE / UL / CSA / CCC		
General Product Approval		Declaration of Conformity	Test Certificates		
(SA)	GOST		EG-Konf.	Special Test Certificate	
Shipping Approval					
ABS	B U R E A U VERITAS		GL	Llovd's Kegister LRS	PRS
Shipping Approval		other			
RINA	RMRS	<u>Confirmation</u>	UDE VDE		
Further informatio	n:				
nformation- and Downttp://www.siemens.co					
ndustry Mall (Online http://www.siemens.co		s/mall			
CAx-Online-Generate					
••••		<b>, Characteristics, FAQ</b> W/view/en/3RT2926-1BE	· •		

http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3RT2926-1BD00-ZX90

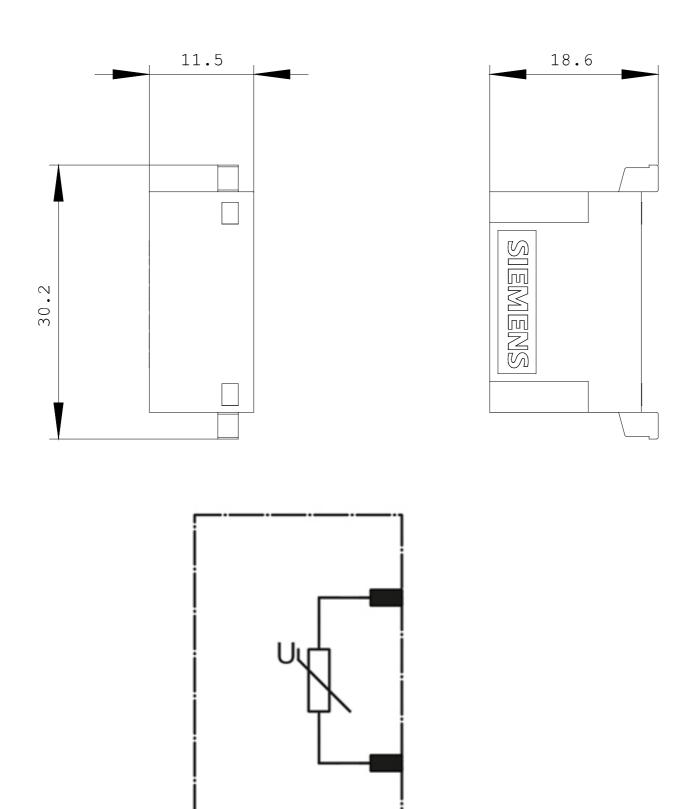

last change:

Jan 21, 2013