



DIGITAL MONITORING RELAY FOR THREE-PHASE LINE VOLTAGE REVERSIBLE PHASE SEQUENCE PHASE FAILURE 3X 160 TO 690V AC 50 TO 60 HZ UNDERVOLT. AND OVERVOLT. 160-690V HYSTERESIS 1-20V 0-20S EACH FOR UMIN AND UMAX 1 W FOR UMIN 1W FOR UMAX SCREW TERMINAL REPLACEMENT PRODUCT F. 3UG3041-1BP50

|                         |                        |
|-------------------------|------------------------|
| <b>Product function</b> | Phase monitoring relay |
|-------------------------|------------------------|

**Measuring circuit:**

|   |   |             |
|---|---|-------------|
| <b>Type of voltage / for monitoring</b>           |   | AC          |
| <b>Number of poles / for main current circuit</b> |   | 3           |
| <b>Measurable voltage</b>                         |   |             |
| • for AC  | V | 160 ... 690 |
| <b>Adjustable voltage range</b>                   | V | 160 ... 690 |
| <b>Adjustable response delay time</b>             |   |             |
| • with lower or upper limit violation             | s | 0.1 ... 20  |
| <b>Relative adjustment accuracy</b>               | % | 0.2         |
| <b>Relative metering precision</b>                | % | 5           |
| <b>Precision of digital display</b>               |   | +/-1 digit  |
| <b>Relative repeat accuracy</b>                   | % | 1           |

**General technical details:**

|                              |  |     |
|------------------------------|--|-----|
| <b>Design of the display</b> |  | LCD |
| <b>Type of display / LED</b> |  | No  |
| <b>Product function</b>      |  |     |
| • undervoltage recognition   |  | Yes |
| • overvoltage recognition    |  | Yes |
| • phase sequence recognition |  | Yes |

|   |    |   |
|---|----|---|
| <ul style="list-style-type: none"> <li>• phase disturbance recognition</li> <li>• asymmetry recognition</li> <li>• overvoltage recognition of 3 phases</li> <li>• undervoltage recognition of 3 phases</li> <li>• tension window recognition of 3 phases</li> <li>• self-reset</li> <li>• open-circuit or closed-circuit current principle</li> </ul> |    | Yes   |
| <b>Starting time / after the control supply voltage has been applied</b>  | ms | 1,000                                       |
| <b>Response time / maximum</b>  | ms | 450   |
| <b>Type of voltage / of the controlled supply voltage</b>   |    | AC  |
| <b>Control supply voltage</b>   |    |   |
| <ul style="list-style-type: none"> <li>• at 50 Hz / at AC <ul style="list-style-type: none"> <li>• rated value</li> </ul> </li> <li>• at 60 Hz / at AC <ul style="list-style-type: none"> <li>• rated value</li> </ul> </li> </ul>  | V  | 160 ... 690                                 |
|   | V  | 160 ... 690                                 |
| <b>Operating range factor control supply voltage rated value</b>  |    |   |
| <ul style="list-style-type: none"> <li>• at 50 Hz <ul style="list-style-type: none"> <li>• for AC</li> </ul> </li> <li>• at 60 Hz <ul style="list-style-type: none"> <li>• for AC</li> </ul> </li> </ul>  |    | 1 ... 1                                     |
|   |    | 1 ... 1                                     |
| <b>Impulse voltage resistance / rated value</b>   | kV | 6   |
| <b>Recorded real power</b>  | W  | 2   |
| <b>Protection class IP</b>  |    | IP20  |
| <b>Electromagnetic compatibility</b>  |    | IEC 60947-1 / IEC 61000-6-2 / IEC 61000-6-4 |
| <b>Resistance against vibration / according to IEC 60068-2-6</b>  |    | 1 ... 6 Hz: 15 mm, 6 ... 500 Hz: 2g         |
| <b>Resistance against shock / according to IEC 60068-2-27</b>   |    | sinusoidal half-wave 15g / 11 ms            |
| <b>Installation altitude / at a height over sea level / maximum</b>   | m  | 2,000                                       |
| <b>Conductor-bound parasitic coupling BURST / according to IEC 61000-4-4</b>  |    | 2 kV  |
| <b>Conductor-bound parasitic coupling conductor-earth SURGE / according to IEC 61000-4-5</b>  |    | 2 kV  |
| <b>Conductor-bound parasitic coupling conductor-conductor SURGE / according to IEC 61000-4-5</b>  |    | 1 kV  |
| <b>Electrostatic discharge / according to IEC 61000-4-2</b>   |    | 6 kV contact discharge / 8 kV air discharge |
| <b>Field-bound parasitic coupling / according to IEC 61000-4-3</b>  |    | 10 V/m                                      |
| <b>Insulation voltage / for overvoltage category III according to IEC 60664 / with degree of pollution 3 / rated value</b>  | V  | 690   |
| <b>Degree of pollution</b>  |    | 3   |
| <b>Ambient temperature</b>  |    |   |
| <ul style="list-style-type: none"> <li>• during operating</li> <li>• during storage</li> </ul>  | °C | -25 ... +60                                 |
|   | °C | -40 ... +85                                 |

|   |    |             |
|---|----|-------------|
| <ul style="list-style-type: none"> <li>during transport</li> </ul>                              | °C | -40 ... +85 |
| <b>Galvanic isolation</b>   |    |             |
| <ul style="list-style-type: none"> <li>between entrance and outlet</li> </ul>                   |    | Yes         |
| <ul style="list-style-type: none"> <li>between the outputs</li> </ul>                           |    | Yes         |
| <ul style="list-style-type: none"> <li>between the voltage supply and other circuits</li> </ul> |    | Yes         |







| <b>Mechanical design:</b>   |    |  |
|---|----|--|
| <b>Width</b>  | mm | 22.5   |
| <b>Height</b>   | mm | 92   |
| <b>Depth</b>  | mm | 91   |
| <b>mounting position</b>  |    | any  |
| <b>Distance, to be maintained, to earthed part</b>  |    |  |
| <ul style="list-style-type: none"> <li>forwards</li> </ul>  | mm | 0  |
| <ul style="list-style-type: none"> <li>backwards</li> </ul>   | mm | 0  |
| <ul style="list-style-type: none"> <li>sideways</li> </ul>  | mm | 0  |
| <ul style="list-style-type: none"> <li>upwards</li> </ul>   | mm | 0  |
| <ul style="list-style-type: none"> <li>downwards</li> </ul>   | mm | 0  |
| <b>Distance, to be maintained, to the ranks assembly</b>  |    |  |
| <ul style="list-style-type: none"> <li>forwards</li> </ul>  | mm | 0  |
| <ul style="list-style-type: none"> <li>backwards</li> </ul>   | mm | 0  |
| <ul style="list-style-type: none"> <li>sideways</li> </ul>  | mm | 0  |
| <ul style="list-style-type: none"> <li>upwards</li> </ul>   | mm | 0  |
| <ul style="list-style-type: none"> <li>downwards</li> </ul>   | mm | 0  |
| <b>Distance, to be maintained, conductive elements</b>  |    |  |
| <ul style="list-style-type: none"> <li>forwards</li> </ul>  | mm | 0  |
| <ul style="list-style-type: none"> <li>backwards</li> </ul>   | mm | 0  |
| <ul style="list-style-type: none"> <li>sideways</li> </ul>  | mm | 0  |
| <ul style="list-style-type: none"> <li>upwards</li> </ul>   | mm | 0  |
| <ul style="list-style-type: none"> <li>downwards</li> </ul>   | mm | 0  |
| <b>Type of mounting</b>   |    | snap-on mounting   |
| <b>Product function / removable terminal for auxiliary and control circuit</b>  |    | Yes  |
| <b>Design of the electrical connection</b>  |    | screw-type terminals   |
| <b>Type of the connectable conductor cross-section</b>  |    |  |
| <ul style="list-style-type: none"> <li>solid</li> </ul>   |    | 1x (0.5 ... 4 mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> )   |
| <ul style="list-style-type: none"> <li>finely stranded <ul style="list-style-type: none"> <li>with wire end processing</li> </ul> </li> </ul> |    | 1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> ) |
| <ul style="list-style-type: none"> <li>for AWG conductors <ul style="list-style-type: none"> <li>solid</li> </ul> </li> </ul>                 |    | 2x (20 ... 14)   |
| <ul style="list-style-type: none"> <li>stranded</li> </ul>  |    | 2x (20 ... 14)   |

|                             |     |             |
|-----------------------------|-----|-------------|
| <b>Tightening torque</b>    |     |             |
| • with screw-type terminals | N·m | 0.8 ... 1.2 |

### Outputs:

|  |     |            |
|--|-----|------------|
| <b>Number of NO contacts / delayed switching</b>                                     |     | 0          |
| <b>Number of NC contacts / delayed switching</b>                                     |     | 0          |
| <b>Number of change-over switches / delayed switching</b>                            |     | 2          |
| <b>Current carrying capacity / of output relay</b>                                   |     |            |
| • at AC-15   |     |            |
| • at 250 V / at 50/60 Hz   | A   | 3          |
| • at 400 V / at 50/60 Hz   | A   | 3          |
| • at DC-13   |     |            |
| • at 24 V  | A   | 1          |
| • at 125 V   | A   | 0.2        |
| • at 250 V   | A   | 0.1        |
| <b>Thermal current / of the contact-affected switching element / maximum</b>         | A   | 5          |
| <b>Operating current / at 17 V / minimum</b>   | mA  | 5          |
| <b>Continuous current / of the DIAZED fuse link of the output relay</b>              | A   | 4          |
| <b>Mechanical operating cycles as operating time / typical</b>                       |     | 10,000,000 |
| <b>Electrical operating cycles as operating time / at AC-15 / at 230 V / typical</b> |     | 100,000    |
| <b>Operating cycles / with 3RT2 contactor / maximum</b>                              | 1/h | 5,000      |

### Certificates/approvals:

| General Product Approval   | EMC   | Test Certificates   |
|--|---|---|
| <br>CCC | <br>GOST | <br>C-TICK |
|  |   | <a href="#">Special Test Certificate</a>  |
| Shipping Approval  | other   |   |
| <br>DNV | <br>GL   | <br>LRS    |
|  |   | <a href="#">Declaration of Conformity</a> <a href="#">other</a>                               |

### Further information:

**Information- and Downloadcenter (Catalogs, Brochures,...)**  
<http://www.siemens.com/industrial-controls/catalogs>

---



**Industry Mall (Online ordering system)**  
<http://www.siemens.com/industrial-controls/mall>

---

**Cax online generator:**  
<http://www.siemens.com/cax>

---

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**  
<http://support.automation.siemens.com/WW/view/en/3UG4615-1CR20/all>

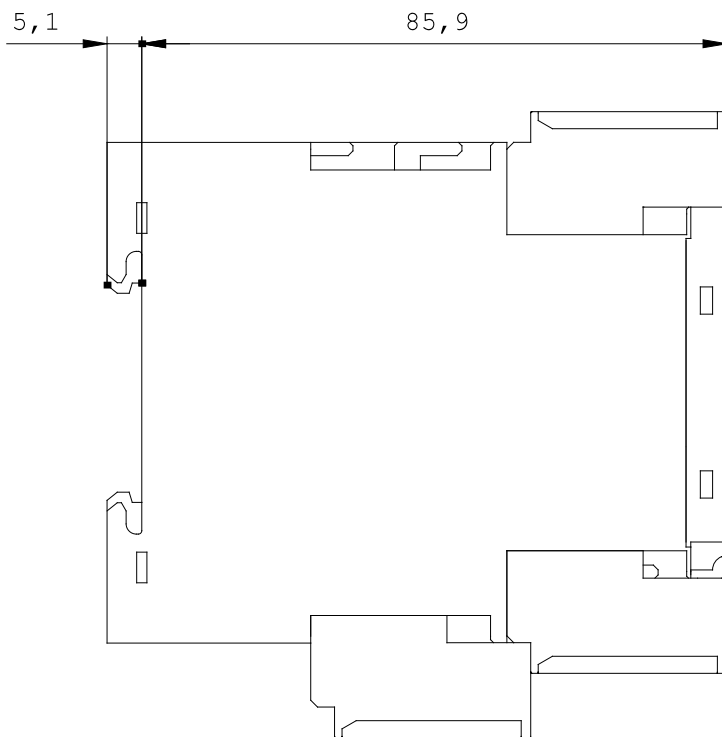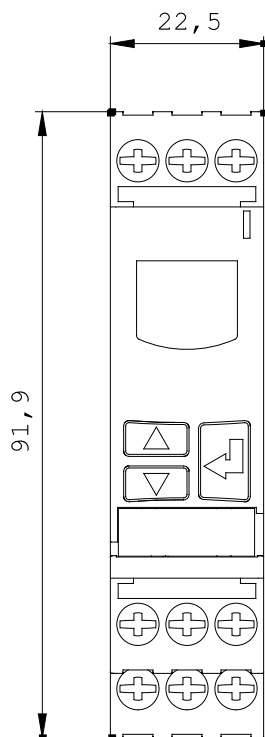

last change:

Feb 18, 2013