

DIGITAL MONITORING RELAY VOLTAGE MONITORING, 22.5MM FROM 10 TO 600V AC/DC OVERSHOOT AND UNDERSHOOT SUPPLY VOLTAGE: AC/DC 24V DC AND AC 50 TO 60 HZ NO GALVANIC ISOLATION FROM MEASURING CIRCUIT INTERF. PEAK DELAY 0.1 TO 20S HYSTERESIS 0.01 TO 300V 1 CO CONTACT W. OR W/O ERROR LOG SPRING-LOADED CONNECTION

<b>Product function</b>	Voltage monitoring relay
-------------------------	--------------------------

**Measuring circuit:**

<b>Type of voltage / for monitoring</b>		AC/DC
<b>Number of poles / for main current circuit</b>		1
<b>Measurable line frequency</b>	Hz	500 ... 40
<b>Measurable voltage</b> • for AC	V	10 ... 600
<b>Adjustable voltage range</b>	V	10 ... 600
<b>Adjustable response delay time</b> • with lower or upper limit violation	s	0.1 ... 20
<b>Response time / maximum</b>	ms	450
<b>Relative metering precision</b>	%	5
<b>Precision of digital display</b>		+/-1 digit
<b>Relative temperature-related measurement deviation</b>	%	0.1
<b>Relative repeat accuracy</b>	%	1

**General technical details:**

<b>Design of the display</b>	LCD
<b>Product function</b>	
• tension window recognition of 1 phase	Yes
• tension window recognition of 3 phases	No
• tension window recognition DC	Yes
• overvoltage recognition of 1 phase	Yes
• overvoltage recognition of 3 phases	No
• overvoltage recognition DC	Yes
• undervoltage recognition of 1 phase	Yes
• undervoltage recognition of 3 phases	No
• undervoltage recognition DC	Yes
• reset external	Yes

<ul style="list-style-type: none"> <li>• self-reset</li> </ul>		Yes
<ul style="list-style-type: none"> <li>• open-circuit or closed-circuit current principle</li> </ul>		Yes
<b>Starting time / after the control supply voltage has been applied</b>	ms	1,000
<b>Type of voltage / of the controlled supply voltage</b>		AC/DC
<b>Control supply voltage</b>		
<ul style="list-style-type: none"> <li>• at 50 Hz / at AC <ul style="list-style-type: none"> <li>• rated value</li> </ul> </li> </ul>	V	24 ... 24
<ul style="list-style-type: none"> <li>• at 60 Hz / at AC <ul style="list-style-type: none"> <li>• rated value</li> </ul> </li> </ul>	V	24 ... 24
<ul style="list-style-type: none"> <li>• for DC <ul style="list-style-type: none"> <li>• rated value</li> </ul> </li> </ul>	V	24 ... 24
<b>Operating range factor control supply voltage rated value</b>		
<ul style="list-style-type: none"> <li>• at 50 Hz <ul style="list-style-type: none"> <li>• for AC</li> </ul> </li> </ul>		0.85 ... 1.15
<ul style="list-style-type: none"> <li>• at 60 Hz <ul style="list-style-type: none"> <li>• for AC</li> </ul> </li> </ul>		0.85 ... 1.15
<ul style="list-style-type: none"> <li>• for DC</li> </ul>		0.85 ... 1.15
<b>Impulse voltage resistance / rated value</b>	kV	4
<b>Recorded real power</b>	W	2
<b>Protection class IP</b>		IP20
<b>Electromagnetic compatibility</b>		IEC 60947-1 / IEC 61000-6-2 / IEC 61000-6-4
<b>Resistance against vibration / according to IEC 60068-2-6</b>		1 ... 6 Hz: 15 mm, 6 ... 500 Hz: 2g
<b>Resistance against shock / according to IEC 60068-2-27</b>		sinusoidal half-wave 15g / 11 ms
<b>Installation altitude / at a height over sea level / maximum</b>	m	2,000
<b>Maximum permissible voltage for safe disconnection</b>		
<ul style="list-style-type: none"> <li>• between control and auxiliary circuit</li> </ul>	V	300
<ul style="list-style-type: none"> <li>• between auxiliary circuit and auxiliary circuit</li> </ul>	V	300
<b>Conductor-bound parasitic coupling BURST / according to IEC 61000-4-4</b>		2 kV
<b>Conductor-bound parasitic coupling conductor-earth SURGE / according to IEC 61000-4-5</b>		2 kV
<b>Conductor-bound parasitic coupling conductor-conductor SURGE / according to IEC 61000-4-5</b>		1 kV
<b>Electrostatic discharge / according to IEC 61000-4-2</b>		6 kV contact discharge / 8 kV air discharge
<b>Field-bound parasitic coupling / according to IEC 61000-4-3</b>		10 V/m
<b>Insulation voltage / for overvoltage category III according to IEC 60664 / with degree of pollution 3 / rated value</b>	V	690
<b>Ambient temperature</b>		
<ul style="list-style-type: none"> <li>• during operating</li> </ul>	°C	-25 ... +60
<ul style="list-style-type: none"> <li>• during storage</li> </ul>	°C	-40 ... +85
<ul style="list-style-type: none"> <li>• during transport</li> </ul>	°C	-40 ... +85

<b>Design of the electrical isolation</b>		Safe isolation
<b>Galvanic isolation</b>		
• between entrance and outlet		Yes
• between the outputs		Yes
• between the voltage supply and other circuits		No
<b>Mechanical operating cycles as operating time / typical</b>		10,000,000
<b>Electrical operating cycles as operating time / at AC-15 / at 230 V / typical</b>		100,000
<b>Operating cycles / with 3RT2 contactor / maximum</b>	1/h	5,000

<b>Mechanical design:</b>		
<b>Width</b>	mm	22.5
<b>Height</b>	mm	94
<b>Depth</b>	mm	91
<b>mounting position</b>		any
<b>Distance, to be maintained, to earthed part</b>		
• forwards	mm	0
• backwards	mm	0
• sideways	mm	0
• upwards	mm	0
• downwards	mm	0
<b>Distance, to be maintained, to the ranks assembly</b>		
• forwards	mm	0
• backwards	mm	0
• sideways	mm	0
• upwards	mm	0
• downwards	mm	0
<b>Distance, to be maintained, conductive elements</b>		
• forwards	mm	0
• backwards	mm	0
• sideways	mm	0
• upwards	mm	0
<b>Type of mounting</b>		snap-on mounting
<b>Product function / removable terminal for auxiliary and control circuit</b>		Yes
<b>Design of the electrical connection</b>		spring-loaded terminals
<b>Type of the connectable conductor cross-section</b>		
• solid		2x (0.25 ... 1.5 mm <sup>2</sup> )
• finely stranded		
• with wire end processing		2 x (0.25 ... 1.5 mm <sup>2</sup> )

- without wire end processing
- for AWG conductors
  - solid
  - stranded

2x (0.25 ... 1.5 mm<sup>2</sup>)








2x (24 ... 16)

2x (24 ... 16)

#### Outputs:

Number of NO contacts / delayed switching		0
Number of NC contacts / delayed switching		0
Number of change-over switches / delayed switching		1
Operating current / at 17 V / minimum	mA	5
Continuous current / of the DIAZED fuse link of the output relay	A	4
Thermal current / of the contact-affected switching element / maximum	A	5

#### Certificates/approvals:

General Product Approval			EMC	Test Certificates
 CCC	 GOST	 UL	 C-TICK	<a href="#">Special Test Certificate</a>
Shipping Approval			other	
 DNV	 GL	 LRS	<a href="#">Declaration of Conformity</a>	<a href="#">other</a>

#### Further information:

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

##### Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

##### Cax online generator:



<http://www.siemens.com/cax>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WWW/view/en/3UG4632-2AA30/all>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3UG4632-2AA30](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3UG4632-2AA30)

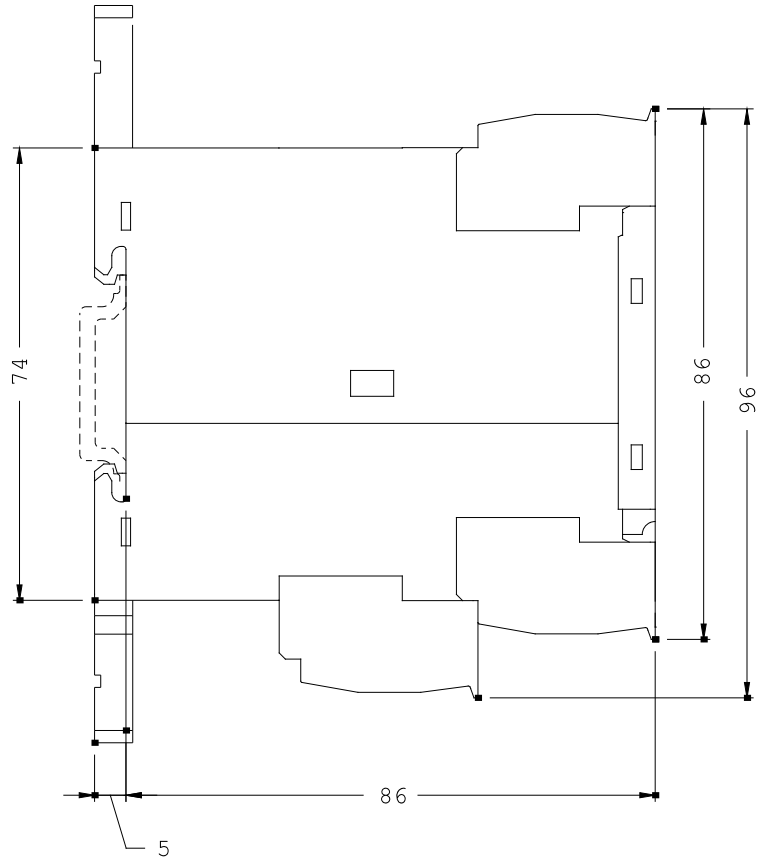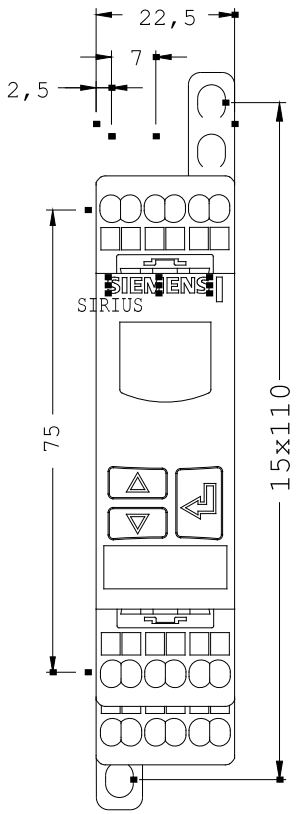

last change:

Feb 18, 2013