



CIRCUIT-BREAKER VL 400N STANDARD BREAKING  
CAPACITY ICU=55KA / 415 V AC 4 POLE,  
NON-AUTOMATIC OVERCURRENT RELEASE MAGNETIC  
IN=400A,  
RATED CURRENT II=4000A, SHORT CIRCUIT

Similar to image

#### Further information:

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

##### Global Industry Mall (Online ordering system)





<http://www.siemens.com/lowvoltage/mall>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3VL4740-1EE46-..../all>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VL4740-1EE46-....](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VL4740-1EE46-....)

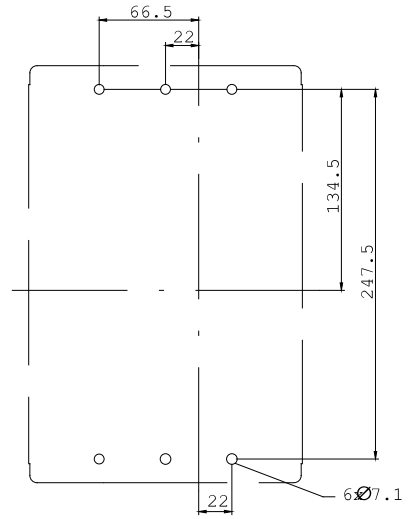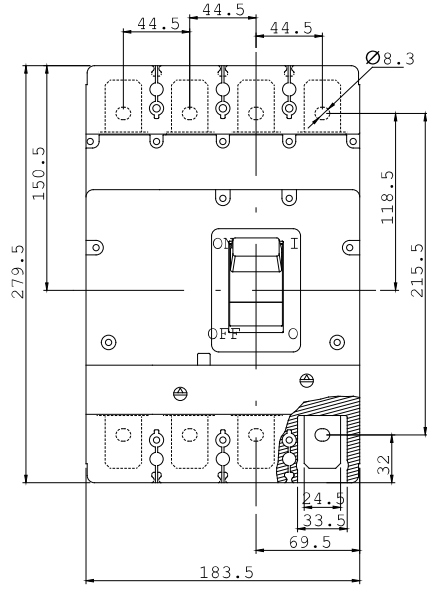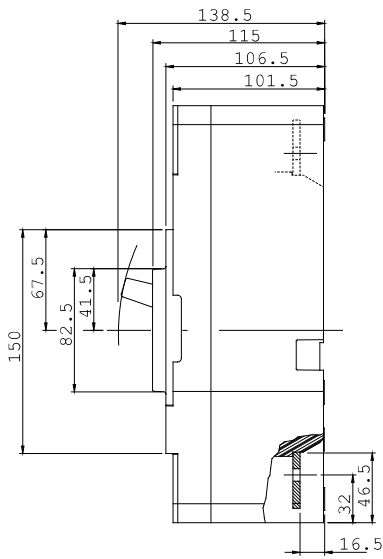

last change:

Feb 8, 2013