



MINIALIZED-FUSE-SWITCH-DISCONNECT. FOR NEOZED  
FUSE LINK 2-16A D01/16A,  
3POLE, D=70MM

Similar to image

#### Technical data:

Number of poles		3
Size of the fallback-system / acc. to DIN EN 60269-1		D01
Operating voltage / for AC / rated value	V	400
Current / for AC / rated value	A	16

#### Certificates/approvals:

General Product Approval

Declaration of Conformity



#### Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>



Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WWW/view/en/5SG7630/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SG7630](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SG7630)

Tender specifications  
[Datanorm](#) [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

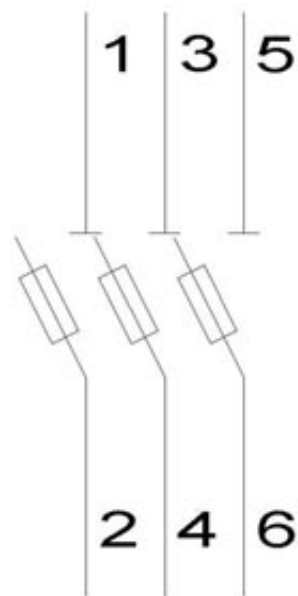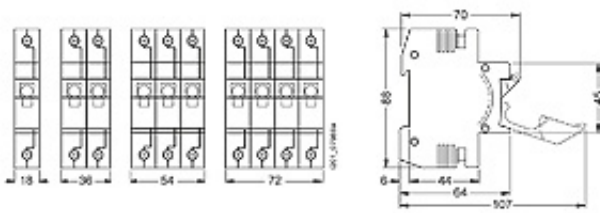

last change:

Jan 30, 2013