

CIRCUIT BREAKER 400V 6KA, 4POLE, B, 20A



Similar to image

**Technical data:**

<b>mounting position</b>		any
<b>Height</b>	mm	90
<b>Width</b>	mm	36
<b>Depth</b>	mm	76
<b>Mounting depth</b>	mm	70
<b>Current / for AC / rated value</b>	A	20
<b>Tripping characteristic class</b>		B
<b>Supply voltage</b>		
• for AC / rated value	V	400
• with multi-phase operation / with AC / rated value	V	400
<b>Supply voltage frequency / rated value</b>	Hz	50
<b>Operating voltage</b>		
• minimum	V	24
• with multi-phase operation / with AC / maximum	V	440
• for DC / rated value / maximum	V	60
<b>Number of poles</b>		4
<b>Number of poles /note</b>		4P
<b>Switching capacity current</b>		

<ul style="list-style-type: none"> <li>• in accordance with IEC 60947-2 / rated value</li> <li>• acc. to EN 60898 / rated value</li> </ul>	kA	6
	kA	6
<b>Active power loss / at rated value current / with AC / in warm operating state / per pole</b>	W	2.1
<b>Number of pitch units for width</b>		4
<b>Product feature / sealable</b>		Yes
<b>Protection class IP</b>		IP20, with connected conductors
<b>Degree of pollution</b>		2
<b>Influence of the surrounding temperature</b>		Periodically +55°C, max. 95% humidity
<b>Ambient temperature</b>	°C	-25 ... +45
<b>Ambient temperature / during storage</b>	°C	-40 ... +75
<b>Mechanical operating cycles as operating time / typical</b>		20,000
<b>Product equipment / touch-protection</b>		Yes
<b>type of voltage</b>		AC/DC
<b>Insulation voltage</b>		
<ul style="list-style-type: none"> <li>• with multi-phase operation / with AC / rated value</li> </ul>	V	440
<b>Conductor cross-section that can be connected</b>		
<ul style="list-style-type: none"> <li>• solid</li> </ul>	mm <sup>2</sup>	0.75 ... 35
<ul style="list-style-type: none"> <li>• multibrin</li> </ul>	mm <sup>2</sup>	0.75 ... 35
<ul style="list-style-type: none"> <li>• finely stranded</li> </ul>		
<ul style="list-style-type: none"> <li>• with wire end processing</li> </ul>	mm <sup>2</sup>	0.75 ... 25
<b>Tightening torque</b>		
<ul style="list-style-type: none"> <li>• with screw-type terminals</li> </ul>	N·m	2.5 ... 3
<b>Product feature</b>		
<ul style="list-style-type: none"> <li>• [not supplied - silicon-free]</li> </ul>		Yes
<ul style="list-style-type: none"> <li>• halogen-free</li> </ul>		Yes
<b>Number of test cycles / for environmental testing / in accordance with IEC 60068-2-30</b>		6
<b>Item designation / according to DIN EN 61346-2</b>		F
<b>Device tag / according to DIN EN 81346-2</b>		F

#### Certificates/approvals:

##### General Product Approval

##### Declaration of Conformity



[other](#)



other

[other](#)

#### Further information:

---

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

---

**Industry Mall (Online ordering system)**

<http://www.siemens.com/lowvoltage/maill>

---

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/5SL6420-6/all>

---

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SL6420-6](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SL6420-6)

---


**CAX-Online-Generator**

<http://www.siemens.com/cax>

---

**Tender specifications**

[Datanorm](#) [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

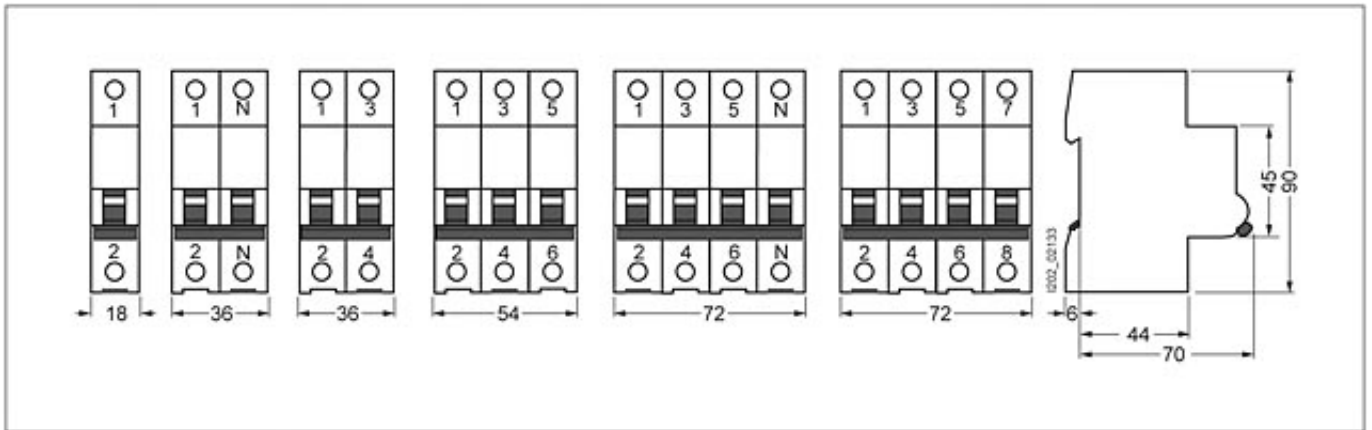

last change:

Feb 18, 2013