









CIRCUIT BREAKER T55 400V, 6KA, 3-POLE, C, 13A

General technical data:


type of voltage		AC/DC
Mounting depth	mm	55
Current / for AC / rated value	A	13
Tripping characteristic class		C
Supply voltage / for AC / rated value	V	400
Switching capacity current		
• in accordance with IEC 60947-2 / rated value	kA	10
• acc. to EN 60898 / rated value	kA	6
Number of pitch units for width		3
Degree of pollution		3
Overvoltage class		3

Certificates/approvals:

General Product Approval			Declaration of Conformity	Test Certificates
 CSA	 GOST	 KETI	 VDE	 EG-Konf.
Shipping Approval		other		
 LRS	other	Environmental Confirmations		

Further information:

- Information- and Downloadcenter (Catalogs, Brochures,...)**
<http://www.siemens.com/lowvoltage/catalogs>
- Industry Mall (Online ordering system)**
<http://www.siemens.com/lowvoltage/mall>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**
<http://support.automation.siemens.com/WW/view/en/5SX2313-7/all>
- Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SX2313-7
- CAX-Online-Generator**
<http://www.siemens.com/cax>

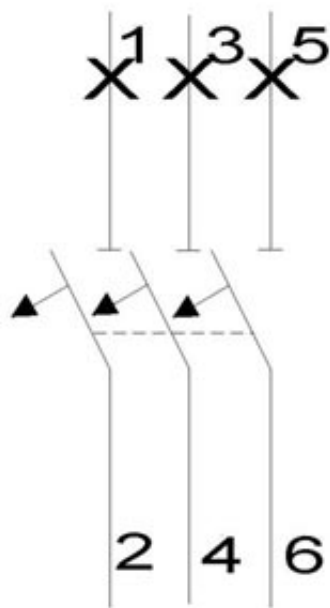

last change:

Sep 24, 2012