

SWITCH, D=70MM 40A 2NC







Similar to image

**Technical data:**

<b>Mounting depth</b>	mm	70
<b>Operating voltage / rated value</b>	V	400
<b>Operating current / rated value</b>	A	40
<b>type of voltage</b>		AC
<b>Number of poles</b>		2
<b>Breaking capacity current / rated value</b>	kA	0.12
<b>Resistance against short-circuit current</b>	kA	10
<b>Design of the switching function</b>		Off switch
<b>Number of pitch units for width</b>		2
<b>Number of NC contacts</b>		0
<b>Number of NO contacts</b>		2
<b>Number of change-over switches</b>		0
<b>Product component / Signal lamp</b>		No
<b>Product function / positive opening (acc. to DIN VDE 0113)</b>		No

**Certificates/approvals:**

General Product Approval			Declaration of Conformity	Test Certificates	other
				<a href="#">Type Test Certificates/Test Report</a>	<a href="#">Environmental Confirmations</a>
CCC	GOST	VDE	EG-Konf.		

**Further information:**

**Information- and Downloadcenter (Catalogs, Brochures,...)**  
<http://www.siemens.com/lowvoltage/catalogs>


**Industry Mall (Online ordering system)**  
<http://www.siemens.com/lowvoltage/mall>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**  
<http://support.automation.siemens.com/WW/view/en/5TE8412/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**  
[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5TE8412](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TE8412)

**CAX-Online-Generator**  
<http://www.siemens.com/cax>

**Tender specifications**  
[Datanorm GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

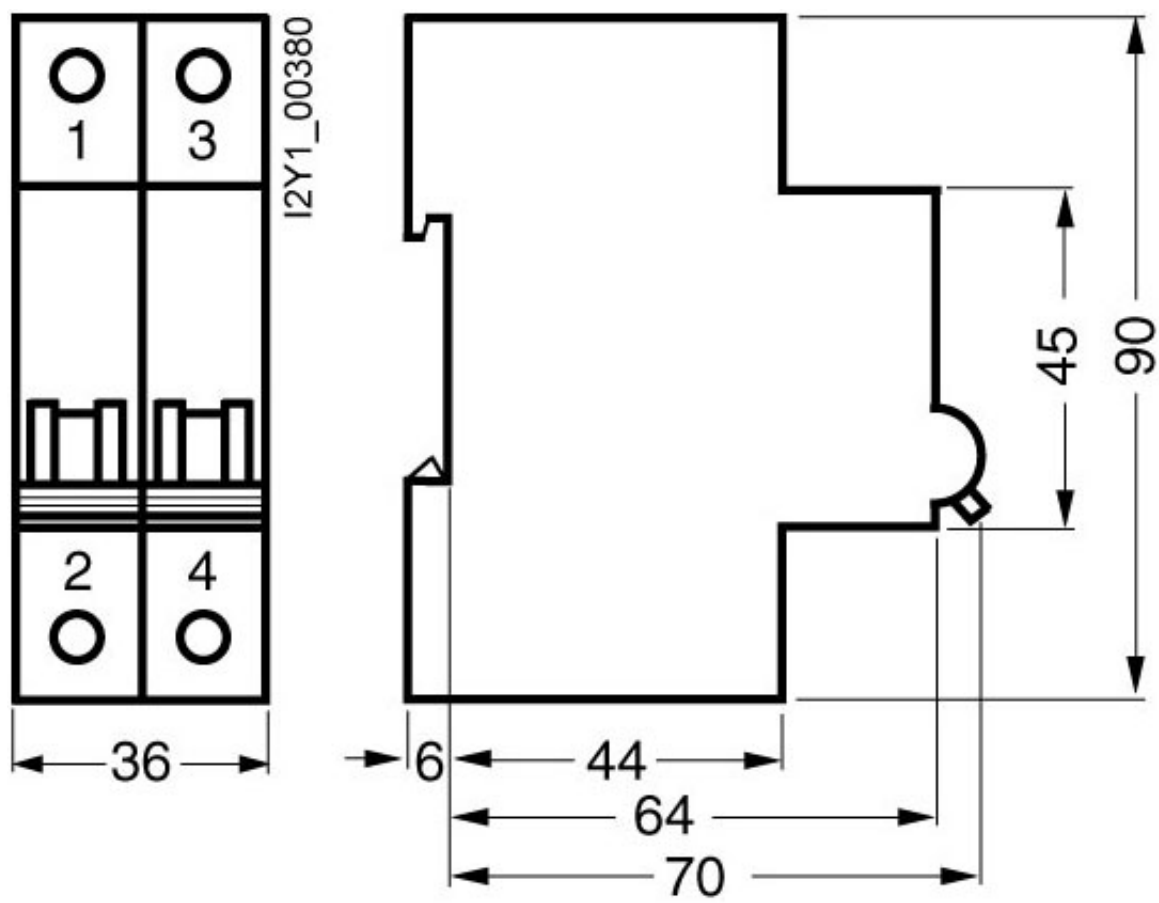

last change:

Nov 16, 2012