







ON-OFF SWITCH, T=70 MM 63 A 3NO+N,
WITH RED GRIP

Similar to image

Technical data:

Mounting depth	mm	70
Operating voltage / rated value	V	400
Operating current / rated value	A	63
type of voltage		AC
Number of poles		4
Breaking capacity current / rated value	kA	0.196
Resistance against short-circuit current	kA	10
Design of the switching function		Off switch
Number of pitch units for width		4
Number of NC contacts		0
Number of NO contacts		3
Number of change-over switches		0
Product component / Signal lamp		No
Product function / positive opening (acc. to DIN VDE 0113)		No

Certificates/approvals:

General Product Approval		Declaration of Conformity	Test Certificates	other
 CCC	 GOST	 VDE	 EG-Konf.	Type Test Certificates/Test Report Environmental Confirmations

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/lowvoltage/catalogs>


Industry Mall (Online ordering system)
<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<http://support.automation.siemens.com/WW/view/en/5TE8524/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TE8524

CAX-Online-Generator
<http://www.siemens.com/cax>

Tender specifications
[Datanorm GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

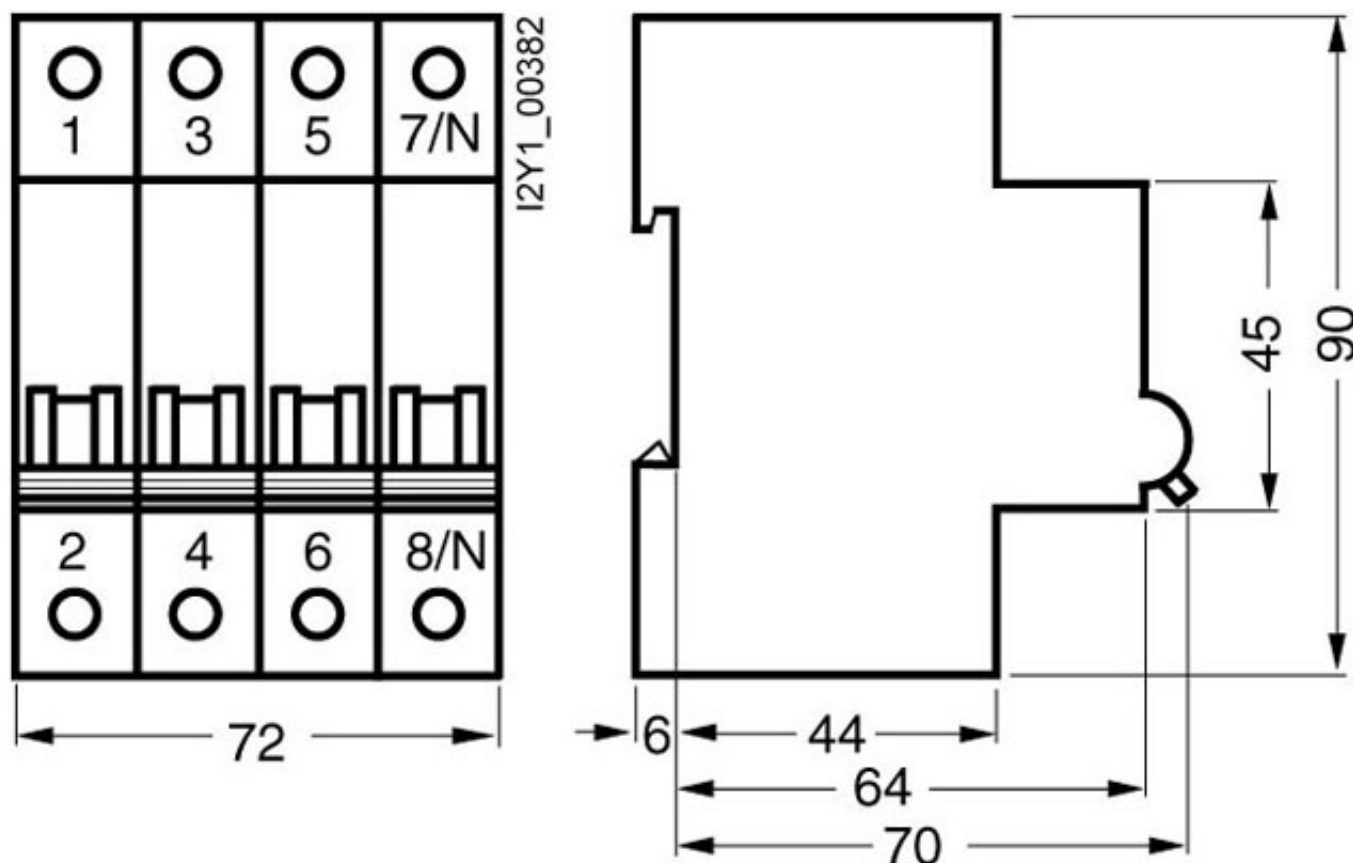

last change:

Nov 16, 2012