

SWITCH 80A 4NO



Similar to image

**Technical data:**

<b>Mounting depth</b>	mm	70
<b>Operating voltage / rated value</b>	V	400
<b>Operating current / rated value</b>	A	80
<b>type of voltage</b>		AC
<b>Number of poles</b>		4
<b>Breaking capacity current / rated value</b>	kA	0.24
<b>Resistance against short-circuit current</b>	kA	10
<b>Design of the switching function</b>		Off switch
<b>Number of pitch units for width</b>		4
<b>Number of NC contacts</b>		0
<b>Number of NO contacts</b>		4
<b>Number of change-over switches</b>		0
<b>Product component / Signal lamp</b>		No
<b>Product function / positive opening (acc. to DIN VDE 0113)</b>		No

**Certificates/approvals:**

General Product Approval

Declaration of  
Conformity

other



[Environmental  
Confirmations](#)

**Further information:**

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5TE8615/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5TE8615](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TE8615)

CAx-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

[Datanorm GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

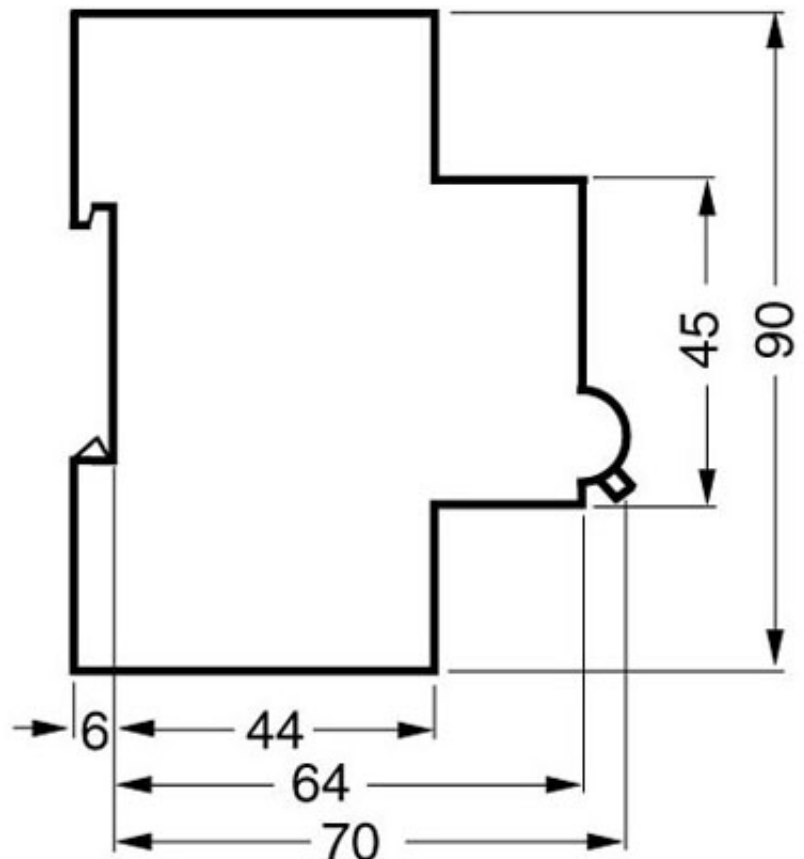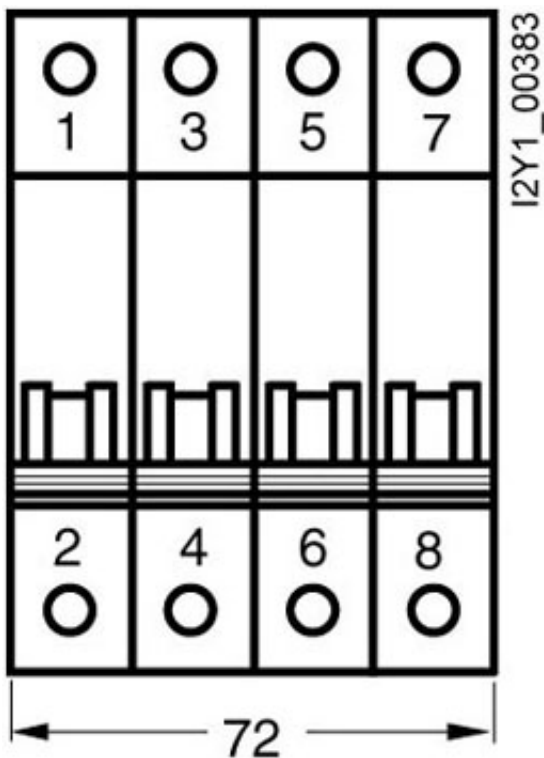

last change:

Nov 16, 2012