






ON-OFF SWITCH, T=70 MM 100 A 3NO+N,  
WITH RED GRIP

Similar to image

#### Technical data:

Mounting depth	mm	70
Operating voltage / rated value	V	400
Operating current / rated value	A	100
type of voltage		AC
Number of poles		4
Breaking capacity current / rated value	kA	0.3
Resistance against short-circuit current	kA	10
Design of the switching function		Off switch
Number of pitch units for width		4
Number of NC contacts		0
Number of NO contacts		3
Number of change-over switches		0
Product component / Signal lamp		No
Product function / positive opening (acc. to DIN VDE 0113)		No

#### Certificates/approvals:

General Product Approval	Declaration of Conformity	Test Certificates	other
 GOST	 VDE	 EG-Konf.	<a href="#">Type Test Certificates/Test Report</a> <a href="#">Environmental Confirmations</a>

**Further information:**

**Information- and Downloadcenter (Catalogs, Brochures,...)**  
<http://www.siemens.com/lowvoltage/catalogs>


**Industry Mall (Online ordering system)**  
<http://www.siemens.com/lowvoltage/mall>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**  
<http://support.automation.siemens.com/WW/view/en/5TE8724/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**  
[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5TE8724](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TE8724)

**CAX-Online-Generator**  
<http://www.siemens.com/cax>

**Tender specifications**  
[Datanorm GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

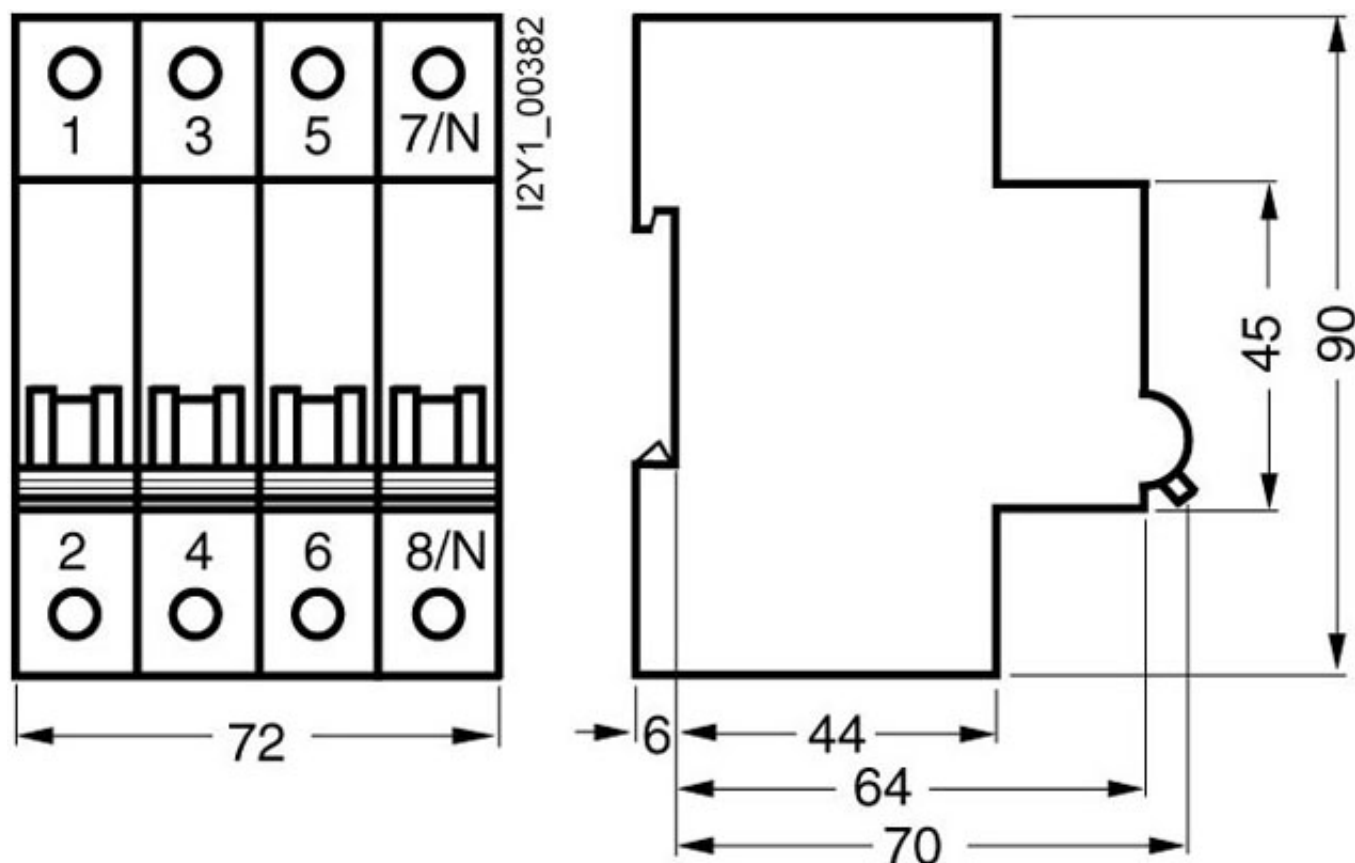

last change:

Nov 16, 2012