

SWITCH 125A 4NO



Similar to image

Technical data:

| | | |
|---|----|------------|
| Mounting depth | mm | 70 |
| Operating voltage / rated value | V | 400 |
| Operating current / rated value | A | 125 |
| type of voltage | | AC |
| Number of poles | | 4 |
| Breaking capacity current / rated value | kA | 0.375 |
| Resistance against short-circuit current | kA | 10 |
| Design of the switching function | | Off switch |
| Number of pitch units for width | | 4 |
| Number of NC contacts | | 0 |
| Number of NO contacts | | 4 |
| Number of change-over switches | | 0 |
| Product component / Signal lamp | | No |
| Product function / positive opening (acc. to DIN VDE 0113) | | No |

Certificates/approvals:

General Product Approval

Declaration of
Conformity

other



[Environmental
Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5TE8815/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TE8815

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

[Datanorm GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

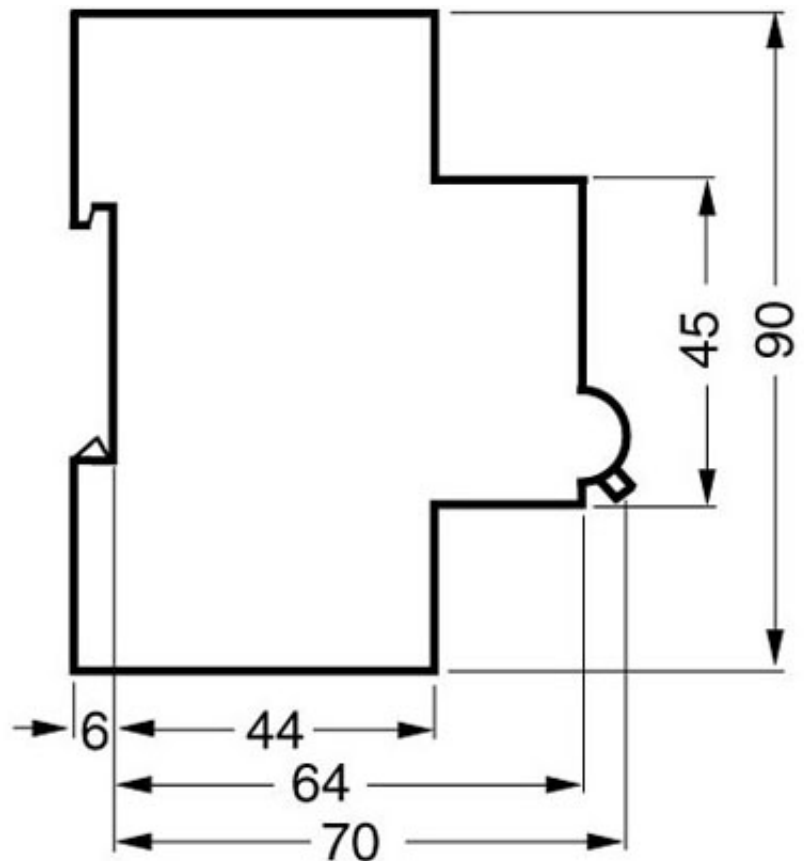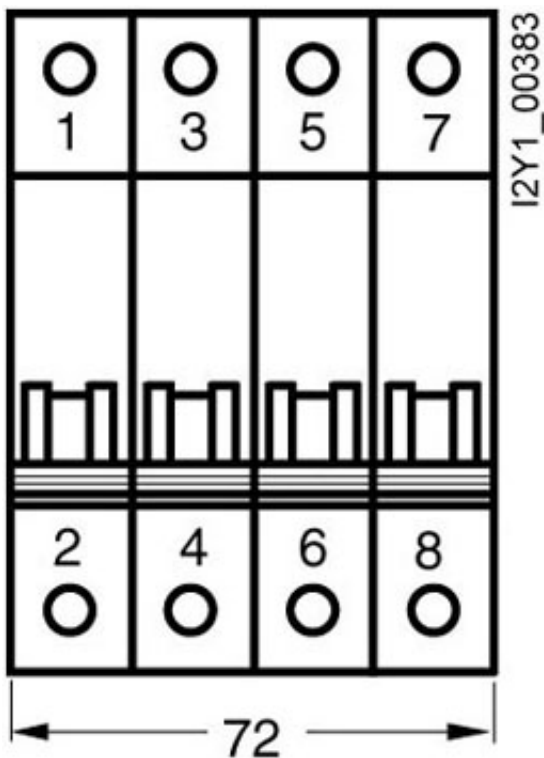

last change:

Nov 16, 2012