



INSTA CONTACTOR W. 2 NO CONT. AND 2 NC CONTACT CONTACT FOR 230, 400 V AC 24 A ACTIVATION 230 V AC 220 V DC




Similar to image

### Technical data:

<b>Mounting depth</b>	mm	64
<b>Height</b>	mm	90
<b>Width</b>	mm	36
<b>Depth</b>	mm	71
<b>Number of NC contacts</b>		2
<b>Number of NO contacts</b>		2
<b>Number of pitch units for width</b>		2
<b>Switching capacity real power / for filament lamp load</b>	W	1,500
<b>Type of voltage</b>		AC/DC
<ul style="list-style-type: none"> <li>• for operating</li> <li>• of the operating voltage</li> </ul>		AC
<b>Control supply voltage / rated value</b>	V	230
<b>Operating current / rated value</b>	A	24
<b>Operating voltage / rated value</b>		
<ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>	V	440
	V	440
<b>Protection class IP</b>		IP20
<b>Product extension / can be installed / supplementary device</b>		Yes

<b>Product component / slide for manual operation</b>		No
<b>Control supply voltage / rated value / maximum</b>	V	230
<b>Item designation</b>		
<ul style="list-style-type: none"> <li>• according to DIN EN 61346-2</li> <li>• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750</li> </ul>		Q Q

#### Certificates/approvals:

General Product Approval	Declaration of Conformity	other
 GOST	 UL	 EG-Konf.
		<a href="#">Environmental Confirmations</a>

#### Further information:

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

##### Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5TT5732-0/all>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5TT5732-0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT5732-0)

##### CAX-Online-Generator

<http://www.siemens.com/cax>

##### Tender specifications

[Datanorm GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

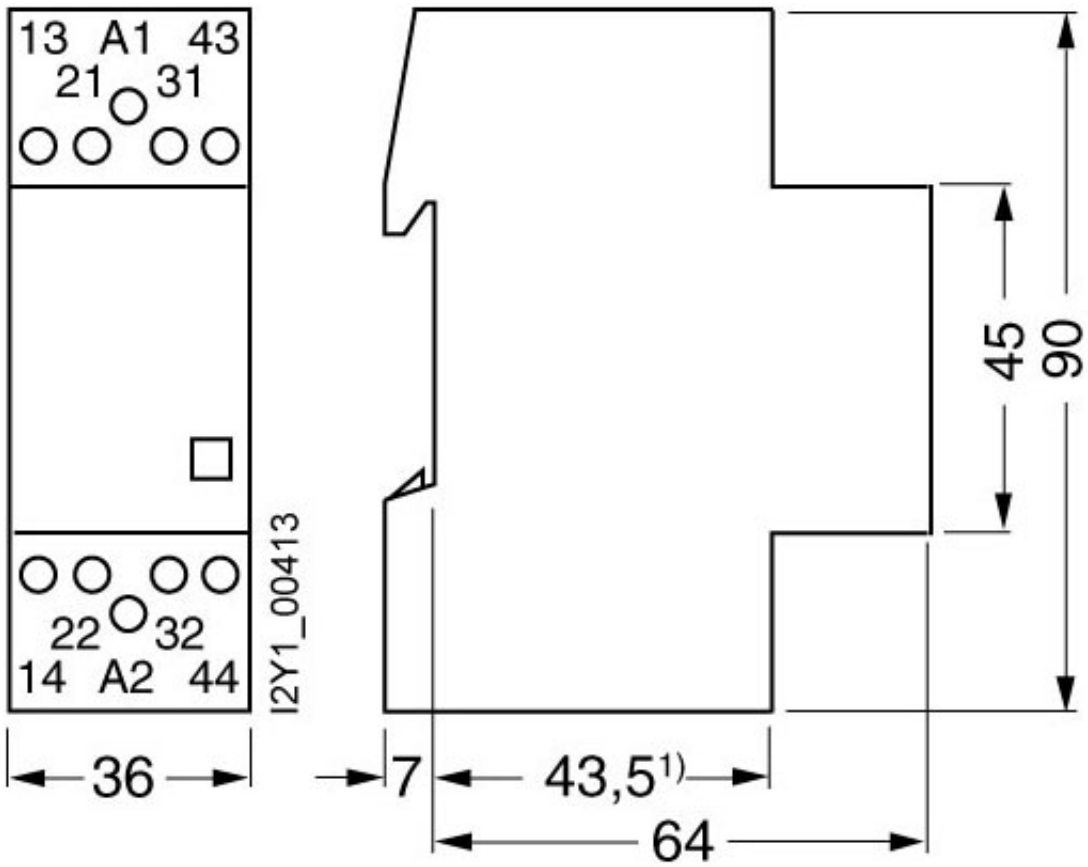

1) Dimension without sealable terminal cover.

last change:

Aug 2, 2012