



INSTA CONTACTOR W. 2 NO CONT. AND 2 NC CONTACT CONTACT FOR 230, 400 V AC 24 A ACTIVATION 24 V AC/DC




Similar to image

### Technical data:

|   |    |       |
|---|----|-------|
| <b>Mounting depth</b>   | mm | 64    |
| <b>Height</b>   | mm | 90    |
| <b>Width</b>  | mm | 36    |
| <b>Depth</b>  | mm | 71    |
| <b>Number of NC contacts</b>  |    | 2     |
| <b>Number of NO contacts</b>  |    | 2     |
| <b>Number of pitch units for width</b>  |    | 2     |
| <b>Switching capacity real power / for filament lamp load</b>   | W  | 1,500 |
| <b>Type of voltage</b>  |    | AC/DC |
| <ul style="list-style-type: none"> <li>• for operating</li> <li>• of the operating voltage</li> </ul> |    | AC    |
| <b>Control supply voltage / rated value</b>   | V  | 24    |
| <b>Operating current / rated value</b>  | A  | 24    |
| <b>Operating voltage / rated value</b>  |    |       |
| <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>                        | V  | 440   |
|   | V  | 440   |
| <b>Protection class IP</b>  |    | IP20  |
| <b>Product extension / can be installed / supplementary device</b>                                    |    | Yes   |

|   |   |        |
|---|---|--------|
| <b>Product component / slide for manual operation</b>   |   | No     |
| <b>Control supply voltage / rated value / maximum</b>   | V | 24     |
| <b>Item designation</b>   |   |        |
| <ul style="list-style-type: none"> <li>• according to DIN EN 61346-2</li> <li>• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750</li> </ul> |   | Q<br>Q |

#### Certificates/approvals:

| General Product Approval  | Declaration of Conformity   | other   |
|---|---|---|
| <br>GOST | <br>UL | <br>EG-Konf. |
|   |   | <a href="#">Environmental Confirmations</a>   |

#### Further information:

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

##### Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5TT5732-2/all>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5TT5732-2](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT5732-2)

##### CAX-Online-Generator

<http://www.siemens.com/cax>

##### Tender specifications

[Datanorm GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

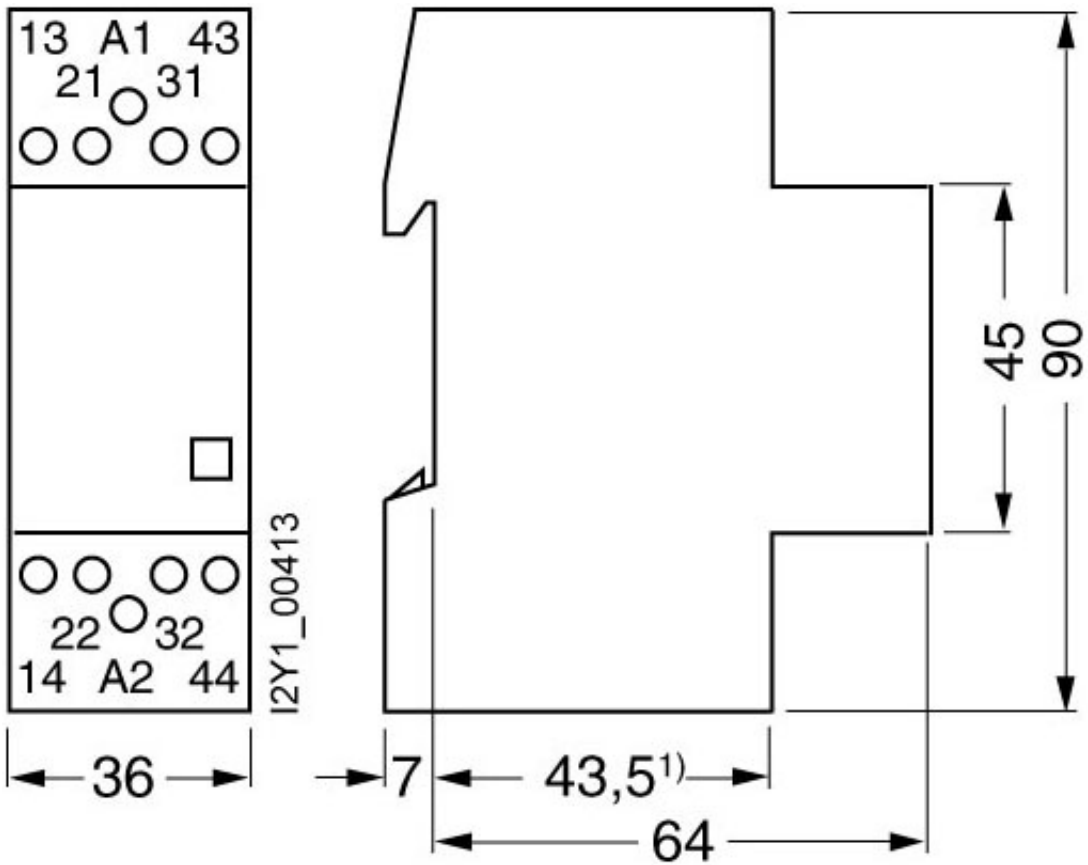

1) Dimension without sealable terminal cover.

last change:

Aug 2, 2012