



INSTA CONTACTOR W. 2 NO CONT. AND 2 NC CONTACTS CONTACT FOR 230, 400 V AC 40 A ACTIVATION 230 V AC 220 V DC




Similar to image

Technical data:

| | | |
|--|----|-------|
| Mounting depth | mm | 64 |
| Height | mm | 90 |
| Width | mm | 54 |
| Depth | mm | 71 |
| Number of NC contacts | | 2 |
| Number of NO contacts | | 2 |
| Number of pitch units for width | | 3 |
| Switching capacity real power / for filament lamp load | W | 3,000 |
| Type of voltage | | AC/DC |
| • for operating | | AC |
| • of the operating voltage | | AC |
| Control supply voltage / rated value | V | 230 |
| Operating current / rated value | A | 40 |
| Operating voltage / rated value | | |
| • minimum | V | 440 |
| • maximum | V | 440 |
| Protection class IP | | IP20 |
| Product extension / can be installed / supplementary device | | Yes |

| | | |
|---|---|--------|
| Product component / slide for manual operation | | No |
| Control supply voltage / rated value / maximum | V | 230 |
| Item designation | | |
| <ul style="list-style-type: none"> • according to DIN EN 61346-2 • according to DIN 40719 extendable after IEC 204-2 / according to IEC 750 | | Q Q |

Certificates/approvals:

| General Product Approval | Declaration of Conformity | other |
|---|---|---|
|  GOST |  UL |  EG-Konf. |
| | | Environmental Confirmations |

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5TT5742-0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT5742-0

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

[Datanorm GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

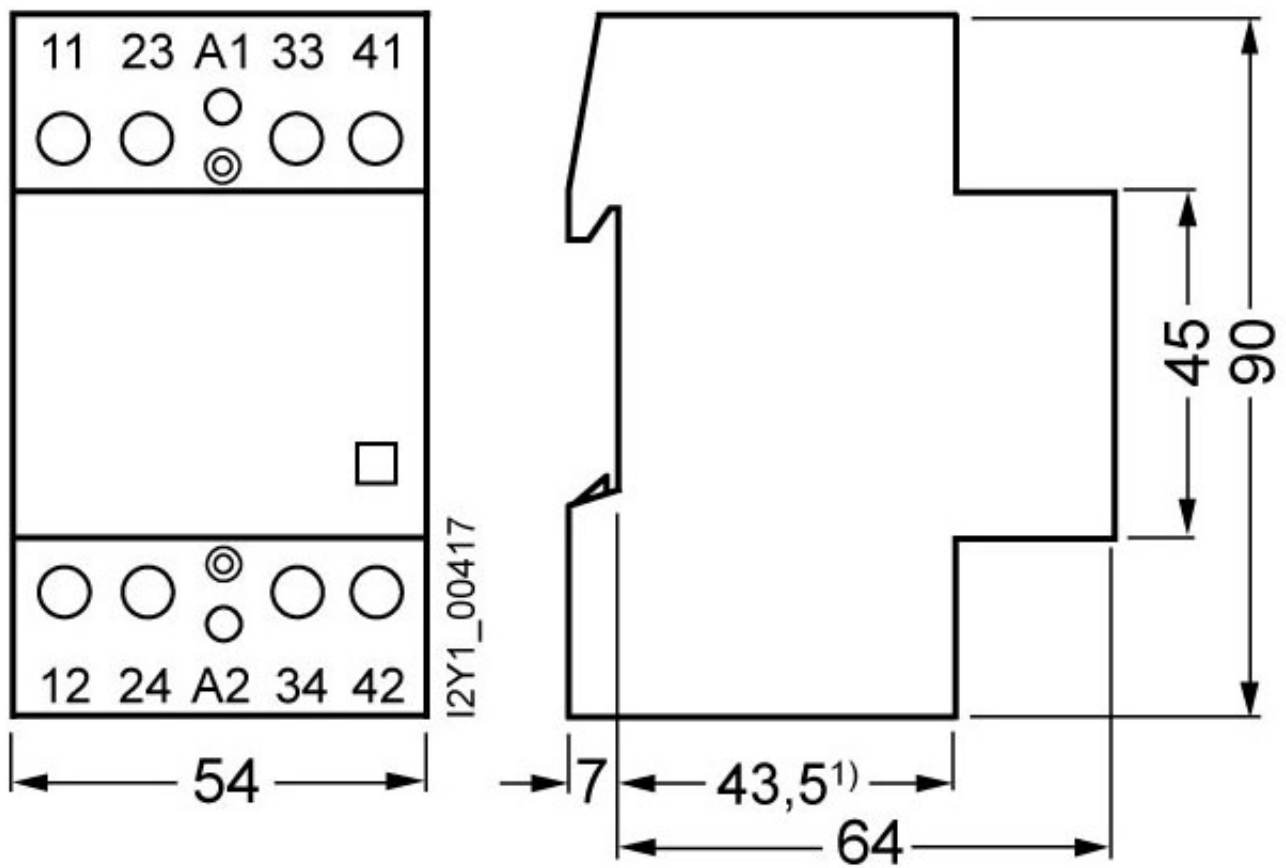

1) Dimension without sealable terminal cover.

last change:

Aug 2, 2012