## **SIEMENS**

Product data sheet 5TT5752-0



INSTA CONTACTOR W. 2 NO CONT. AND 2 NC CONTACTS CONTACT FOR 230, 400 V AC 63 A ACTIVATION 230 V AC 220 V DC

Similar to image

Technical data:		
Mounting depth	mm	64
Height	mm	90
Width	mm	54
Depth	mm	71
Number of NC contacts		2
Number of NO contacts		2
Number of pitch units for width		3
Switching capacity real power / for filament lamp load	W	5,000
Type of voltage		
• for operating		AC/DC
of the operating voltage		AC
Control supply voltage / rated value	V	230
Operating current / rated value	Α	63
Operating voltage / rated value		
• minimum	V	440
• maximum	V	440
Protection class IP		IP20
Product extension / can be installed / supplementary device		Yes

Product component / slide for manual operation		No
Control supply voltage / rated value / maximum	V	230
Item designation		
according to DIN EN 61346-2		Q
<ul> <li>according to DIN 40719 extendable after IEC 204-2 / according to IEC 750</li> </ul>		Q

## Certificates/approvals:

General Product Approval Declaration of Conformity







Environmental Confirmations

## Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/lowvoltage/mall

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

http://support.automation.siemens.com/WW/view/en/5TT5752-0/all

 $Image\ database\ (product\ images,\ 2D\ dimension\ drawings,\ 3D\ models,\ device\ circuit\ diagrams,\ ...)$ 


http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=5TT5752-0

**CAx-Online-Generator** 

http://www.siemens.com/cax

**Tender specifications** 

Datanorm GAEB81 GAEB83 RTF TXT

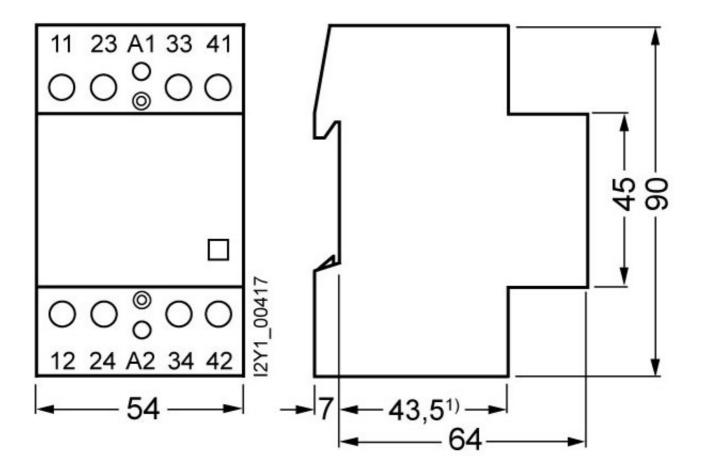

1) Dimension without sealable terminal cover.

last change: Aug 2, 2012