

SITOR FUSE-LINK 315A, AC 1000V,  
SIZE 1/110MM



Similar to image

#### Technical data:

<b>Current / for AC / rated value</b>	A	315
<b>Size of the fallback-system / acc. to DIN EN 60269-1</b>		NH1
<b>Supply voltage</b> • for AC / rated value	V	1,000
<b>Switching capacity current</b> • in accordance with IEC 60947-2 / rated value	kA	65
<b>Design of an identification indicator</b>		others
<b>Ambient temperature</b>	°C	-20 ... +50
<b>Varying load factor (WL)</b>		0.95

#### Certificates/approvals:

General Product Approval

Declaration of Conformity



CCC



GOST



UL



EG-Konf.

#### Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

---

**Industry Mall (Online ordering system)**

<http://www.siemens.com/lowvoltage/mall>

---

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/3NE3230-0B/all>

---


**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3NE3230-0B](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NE3230-0B)

---

**CAX-Online-Generator**

<http://www.siemens.com/cax>

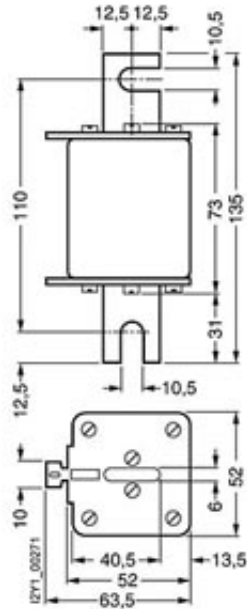

**last change:**

Feb 15, 2013