SIEMENS

Product data sheet 3RS1010-1CK10



TEMPERATURE MONITORING RELAY FOR PT100, UNDERSHOOTING OF 1 THRESH. VAL., WIDTH 22ND5 MM 0 C-100 C, 110-120/220-240V AC 1 NO + 1 NC, CLOSED-CIRC.PRINC. SCREW CONNECTION

General technical details:		
type of voltage		AC
Supply voltage frequency		
 1 / for auxiliary and control current circuit 		
• initial rated value	Hz	50
• final rated value	Hz	60
• 1 / at 50 Hz / for AC / rated value	V	110
• 1 / at 60 Hz / for AC / rated value	V	110
• 2		
• at 60 Hz / for AC		
• rated value	V	230
• at 50 Hz / for AC		
• rated value	V	230
Number of measuring circuits		1
Product function		
defect storage		No
• reset external		No
Measurable temperature		
• initial value	°C	0
• final value	°C	100

Item designation / according to DIN EN 61346-2		К
Item designation / according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		К
Ambient temperature		
during operating	°C	-25 +60

Mechanical design:				
Design of the electrical connection				
• for auxiliary and control current circuit		screw-type terminals		
• jumper socket		Yes		
Design of the sensor / connectable		PT100 (resistance sensor)		
Number of NC contacts / for auxiliary contacts		1		
Number of NO contacts / for auxiliary contacts		1		
Number of change-over switches / for auxiliary contacts		0		
Width	mm	22.5		
Height	mm	92		
Depth	mm	91		

Certificates/approvals:

General Product Approval







Test Certificates
Special Test

Certificate

Declaration of Conformity

other

Environmental Confirmations

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/industrial-controls/mall

Cax online generator:


http://www.siemens.com/cax


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

http://support.automation.siemens.com/WW/view/en/3RS1010-1CK10/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

 $\underline{\text{http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RS1010-1CK10}$

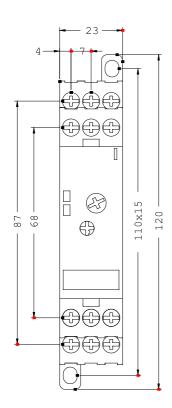

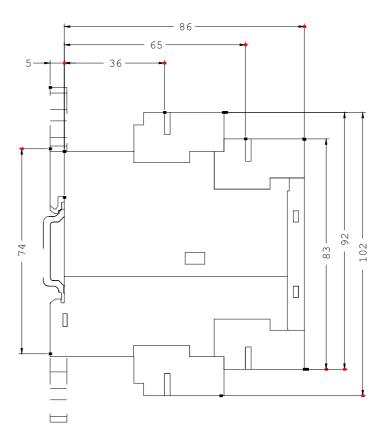

last change: Jan 25, 2013