



INSTA CONTACTOR W. 3 NO CONT. AND 1 NC CONTACT CONTACT FOR 230, 400 V AC 24 A ACTIVATION 230 V AC 220 V DC




Similar to image

Technical data:

Mounting depth	mm	64
Height	mm	90
Width	mm	36
Depth	mm	71
Number of NC contacts		1
Number of NO contacts		3
Number of pitch units for width		2
Switching capacity real power / for filament lamp load	W	1,500
Type of voltage		AC/DC
<ul style="list-style-type: none"> • for operating • of the operating voltage 		AC
Control supply voltage / rated value	V	230
Operating current / rated value	A	24
Operating voltage / rated value		
<ul style="list-style-type: none"> • minimum • maximum 	V	440
	V	440
Protection class IP		IP20
Product extension / can be installed / supplementary device		Yes

Product component / slide for manual operation		No
Control supply voltage / rated value / maximum	V	230
Item designation		
<ul style="list-style-type: none"> • according to DIN EN 61346-2 • according to DIN 40719 extendable after IEC 204-2 / according to IEC 750 		Q Q

Certificates/approvals:

General Product Approval	Declaration of Conformity	other
 GOST	 UL	 EG-Konf.
		Environmental Confirmations

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5TT5731-0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT5731-0

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

[Datanorm GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

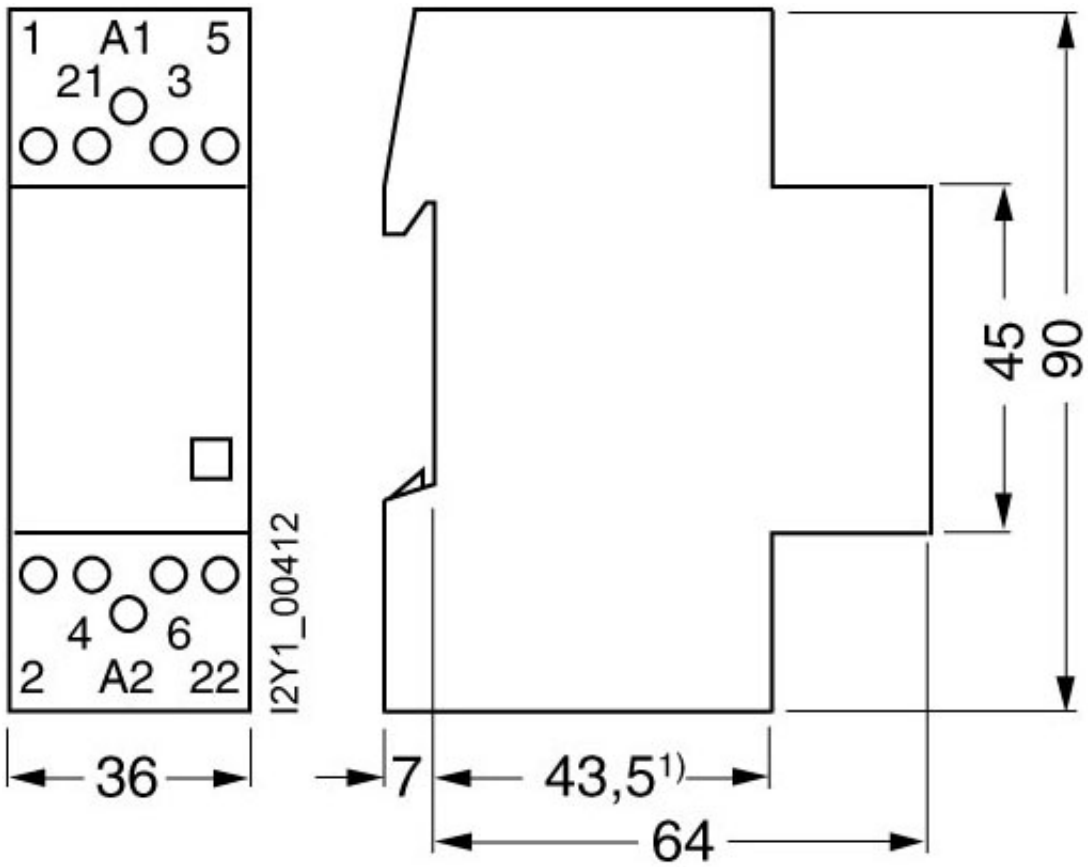

1) Dimension without sealable terminal cover.

last change:

Aug 2, 2012